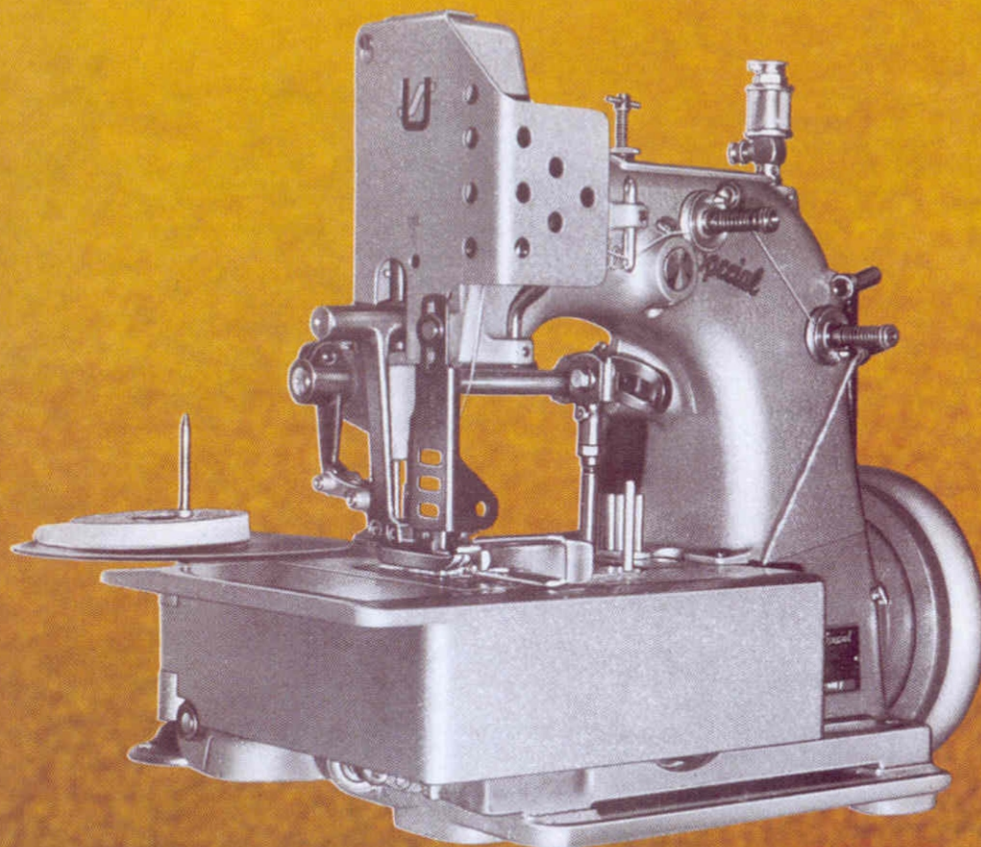
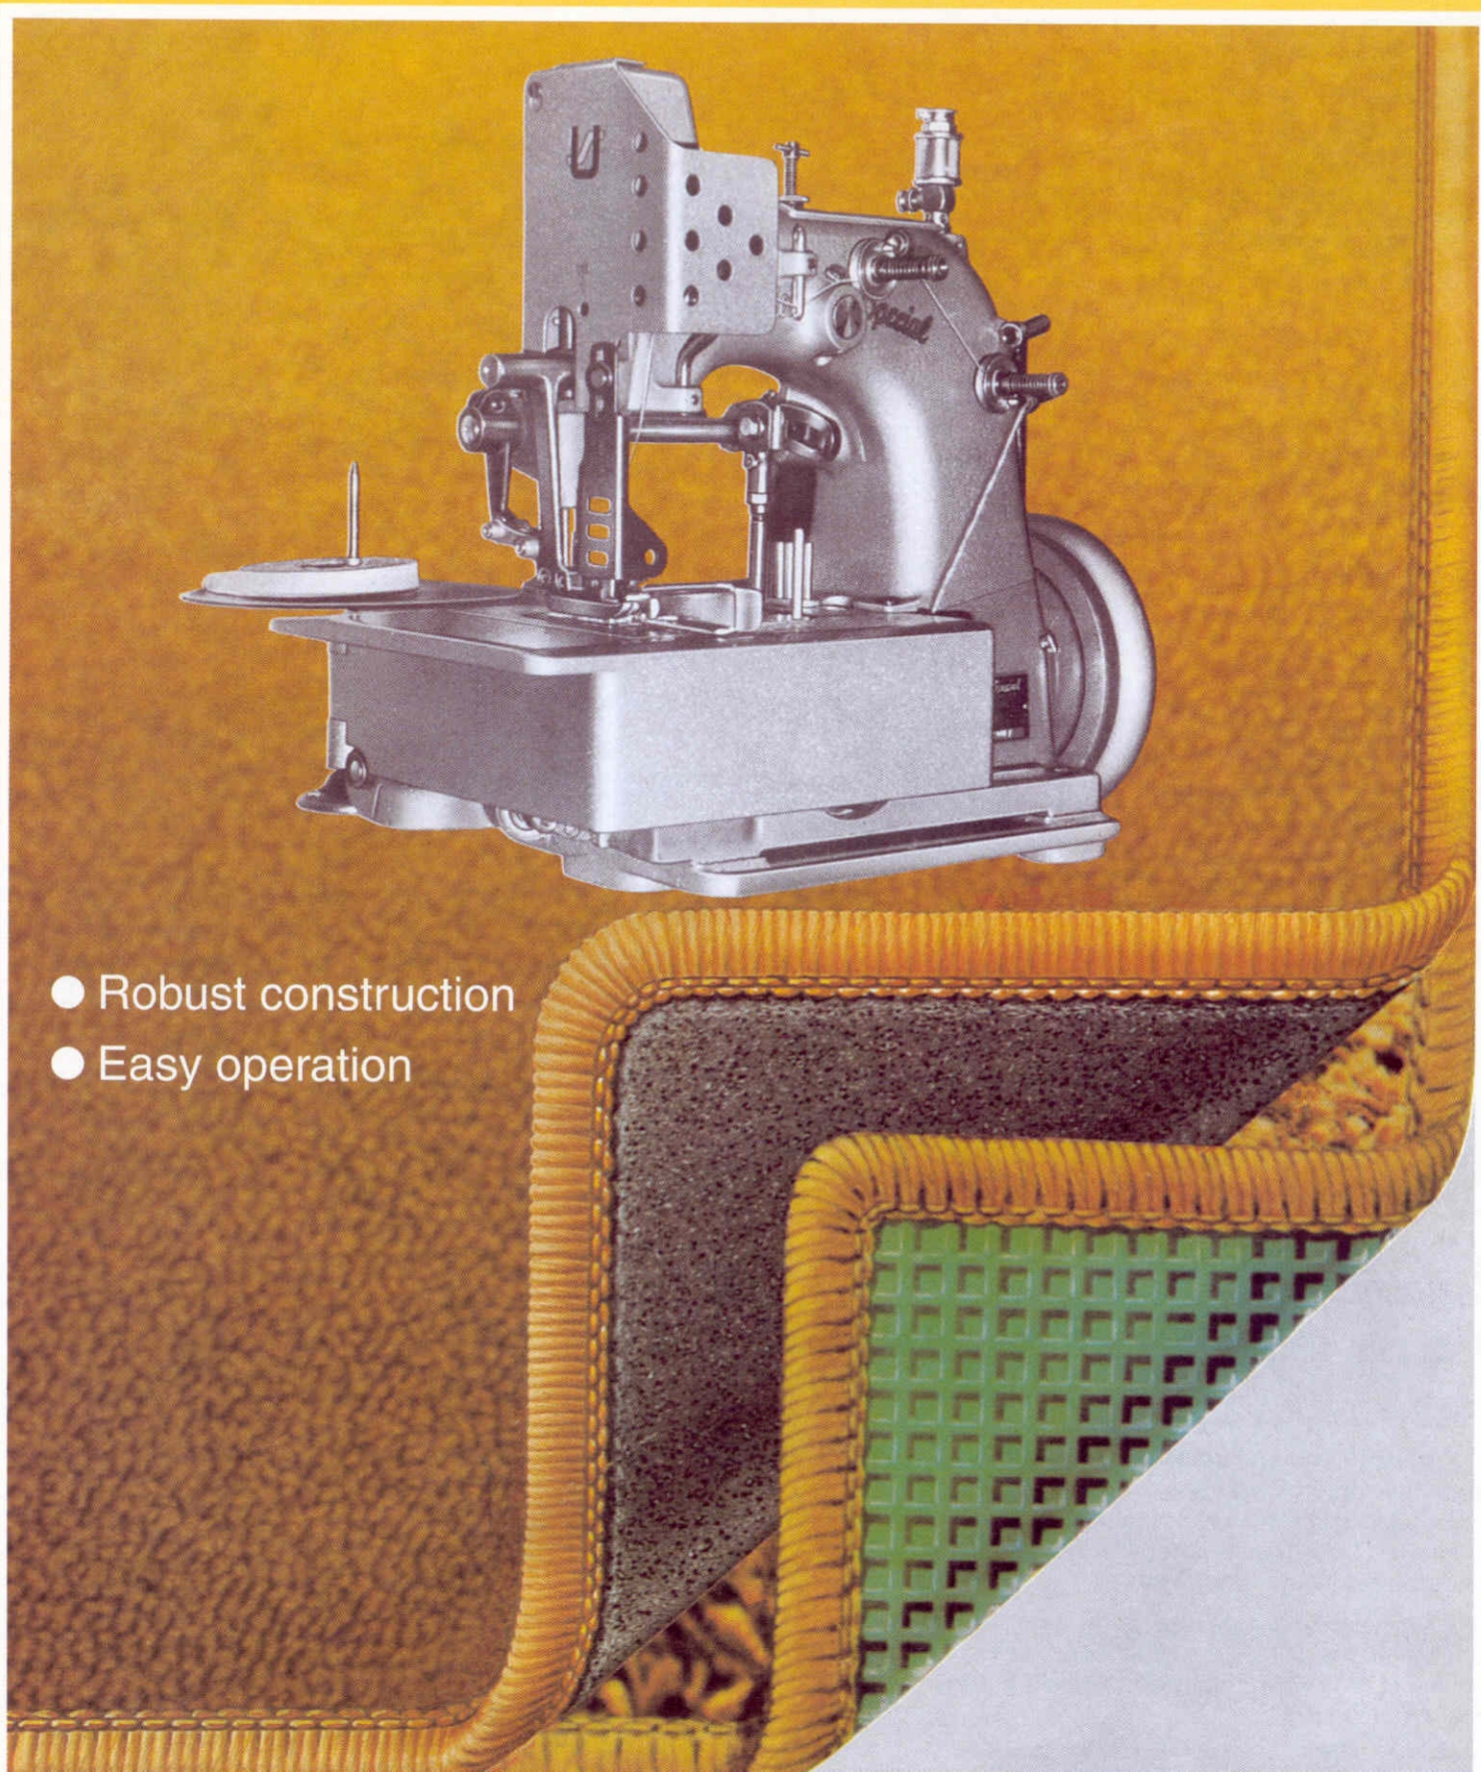


Class 81 200 – Herakles®







Seaming and Hemming Machines for carpets and rugs



- Robust construction
- Easy operation



Class 81 200 – Herakles®

Machine Style	Application	Seam Specification/ Seam Width
81200 C »HERAKLES« Single-needle, three thread carpet overedging machine. Plain feed. Stitch length 8 to 16 SPI (3.2–1.6mm).	For decorative overseaming on carpets and rugs without rubber coated or rubber foam backing.	 8–10 mm
81200 AC »HERAKLES« Single-needle, three thread carpet overedging machine with guide for binding tape. Plain feed with synchronized upper feed. Stitch length 4 to 9 SPI (6.4–2.8mm).	For decorative overseaming on carpets and rugs. The combined upper and lower feed is especially suitable for overedging carpets with rubber coated and rubber foam backing and similar coatings with strong adhesion. The fabric is fed uniformly, without undesired stitch shortenings which perforate the basic carpet tissue. The binding tape is put around the carpet edge by a tape guide and covered by the overedge seam. Width of binding tape 15 mm (19/32 in). Sewing capacity for carpet in tape guide: 12 mm (15/32 in). Depending on carpet material overseaming without binding tape is possible.	 8–10 mm
81200 AG »HERAKLES« Single-needle, two thread carpet overedging machine with guide for binding tape. Plain feed. Stitch length 4 to 9 SPI (6.4–2.8mm).	For decorative overseaming on carpets and rugs (without rubber coated or rubber foam backing). The binding tape is put around the carpet edge by a tape guide and covered by the overedge seam. Width of binding tape 15 mm (19/32 in). Sewing capacity for carpet in tape guide: 6,5 mm (1/4 in).	 8–10 mm
81200 AF »HERAKLES« Single-needle, two thread carpet overedging machine with guide for binding tape. Plain feed with synchronized upper feed. Stitch length 4 to 9 SPI (6.4–2.8mm).	For decorative overseaming on carpets and rugs. The combined upper and lower feed is especially suitable for overedging carpets with rubber coated and rubber foam backing and similar coatings with strong adhesion. The fabric is fed uniformly, without undesired stitch shortenings which perforate the basic carpet tissue. The binding tape is put around the carpet edge by a tape guide and covered by the overedge seam. Width of binding tape 15 mm (19/32 in). Sewing capacity for carpet in tape guide: 12 mm (15/32 in).	 8–10 mm
81200 CZ122 »HERAKLES« Single-needle, two thread carpet serging machine. Plain feed. Stitch length 8 to 16 SPI (3.2–1.6mm).	For serging mats and carpets with inside curves.	 8–10 mm
81200 CZ124 »HERAKLES« Single-needle, three thread carpet serging machine. Plain feed. Stitch length 8 to 16 SPI (3.2–1.6mm).	For serging mats and carpets with inside curves.	 8–10 mm

Union Special® Power Table, height adjustable

For driving these machines, we supply our modern and very robust *Union Special* sewing stand completely installed with clutch motor and plastic laminated table top. When ordering, please state kind of current, voltage, and frequency in your plant.

Union Special Corporation Packaging Division
One Union Special Plaza, Huntley, Illinois 60142
Phone: 847/669-4200, Toll-free in US: 800/344-9698
Fax: 847/669-4355

Union Special GmbH
Raiffeisenstraße 3, D-71696 Möglingen, Federal Republic of Germany
Telefon 07141/247-0, Telex 7264349 unsp d, Telefax 07141/247-100

